


## 1. Dimensions & Weights

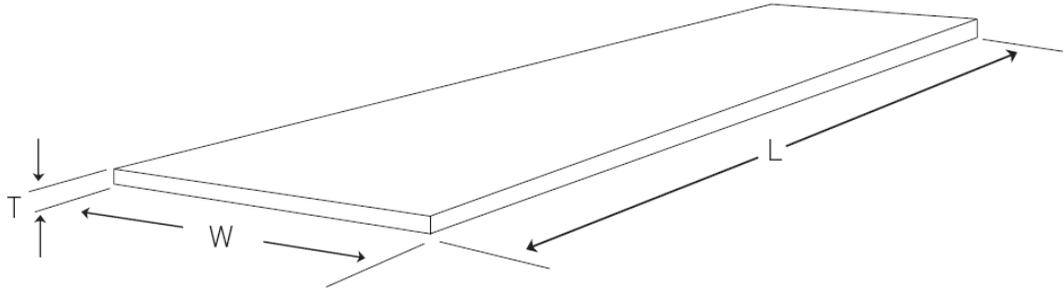

THICKNESS		WIDTH		LENGTH		WEIGHT	
mm	inch	mm	inch	mm	inch	kg	lbs
20	3/4	1,520	60	3,100	122	235	518
30	11/4	1,520	60	3,100	122	353	778

## 1. Loading capacities (20ft container)

THICKNESS (mm)	1520mmX3100mm
20	76 slabs
30	50 slabs

\* Loading capacities may vary by regions.

*This Technical Bulletin is intended to provide guidelines for optimal fabrication, installation, and performance of Lotte Chemical Corp. products mentioned. Though the information contained herein is deemed reliable, none of the contents--including but not limited to the instructions, techniques, graphics, and recommendations--is to be understood as implying legal liability of fitness for a specific purpose, any other type of warranty, or being complete or absolute in its range and nature of information.*

*Depending on the user's particular application, all necessary measures must be taken to verify and test the adequacy for such needs or application. Any information or recommendation herein is strictly for purposes of reference and as such, Lotte Chemical Corp. assumes no responsibility for its suitability or accuracy or the use of such information for products other than Lotte Chemical Corp. Staron® solid surfaces & Radianz® quartz surfaces.*